


KT25TG30-04



OD: 104 mm CD: -
FT: 5 mm ID: 41 mm
MD: 73.5 mm HD: -

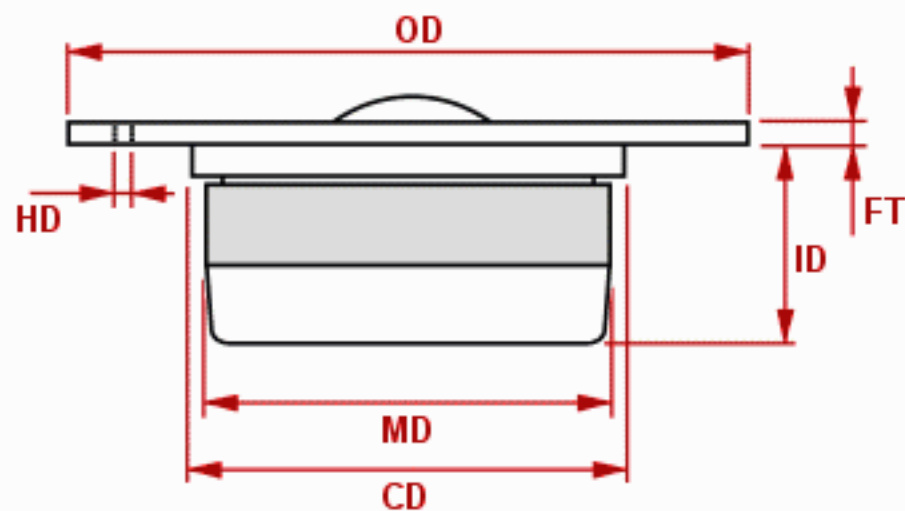

Nominal impedance	4
Voice coil resistance	3.8
Nominal power [W]	140
Short term max power [W]	950
Long term max power [W]	480
Operating power [W]	5.3
Sensitivity [dB]	91.5
Frequency range [kHz]	1.5-40
Free air resonance [Hz]	500
Voice coil diameter [mm]	25
Voice coil height [mm]	2.2
Air gap height [mm]	3.2
Voice coil inductance [mH]	-
Effective diaphr. Area [cm ²]	5.4
Moving mass [g]	0.30
Magnet weight [g]/[oz]	140/8.5
Force factor, BL	2.5
Uas [l]	0.817
Qms	2.5
Qes	0.71
Qts	0.55

Special features

- DUAL CONCENTRIC DIAPHRAGM (PATENT)000
- NON REFLECTIVE DUAL CHAMBER DESIGN000
- VOICE COIL WITH COPPER-CLAD ALUWIRE & BRAIDS000
- CONTROLLED DIRECTIVITY DESIGN000
- NO FERROFLUID000
- HIGH POWER HANDLING000
- WAVE-GUIDE CENTER PLUG (PATENT)

